

5030CVSP 5030CUSP, & 5030CUSP25 Sump Pumps

With a rugged cast iron construction, the 5030CVSP, 5030CUSP, and 5030CUSP25 can handle up to 46 gallons per minute (GPM).

Features:


- Split Capacitor Motor -
3/10 HP continuous duty, thermal protected
- Lifts water up to 25' of vertical height
- 10' power cord, 25' cords are available for an additional charge
- Large 1 1/2" discharge for high capacity pumping
- Also available without a switch
- Non-clogging stainless steel impeller
- Vertical float switch



See Pumps & Accessories
Price List for Limited Warranty details.



Performance Curve

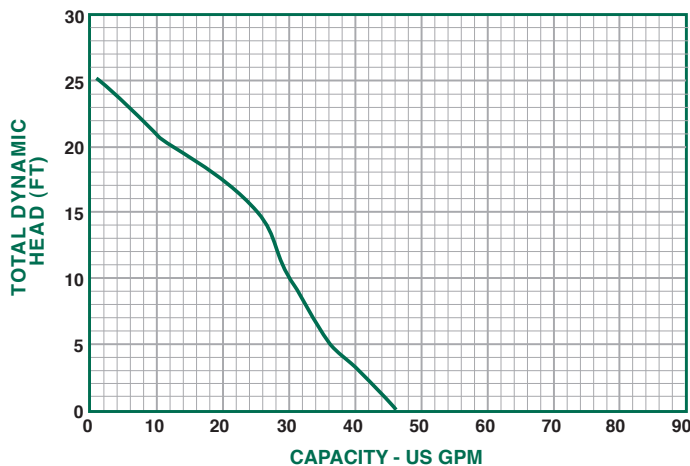

Performance

Model	Gallons per Minute in Feet					
5030CUSP	0	5	10	15	20	25
5030CUSP25	46	36	30	25	12	1
5030CVSP						

Specifications

Model No.	HP	Volts	Hz	Amps	Construction	Discharge Size	Cord Length	Solids Handling	RPM	Phase	Wt.
5030CVSP	3/10	120	60	4.1	Cast Iron	1 1/2"	10'	3/8"	3450	1	20
5030CUSP (NO SWITCH)	3/10	120	60	4.1	Cast Iron	1 1/2"	10'	3/8"	3450	1	18
5030CUSP25 (NO SWITCH)	3/10	120	60	4.1	Cast Iron	1 1/2"	25'	3/8"	3450	1	19

Dimensions

