

Model# 0650-60-AD0

Single Handle Pre-Rinse Faucet


FEATURES & SPECIFICATIONS

- Lever Handle
- 24" Quick Install Riser With Spring Guide
- 44" Flexible Stainless Steel Hose
- Ceramic Disc Cartridge With Temperature Limit Stop
- Back Flow Preventers
- Easy-Install 30" Flex Supply Lines With 3/8" Connections
- 1.1 GPM Flow Rate, 6.5 ozf Spray Force Spray Valve
- 1.1 GPM Flow Rate, 6.5 ozf Spray Force Spray Valve
- 2-Hole 4" to 6" Installation
- Pipe Strap and Hook Assembly
- Secondary Control Valve
- Add-On Faucet
- 6" Swivel Tube Spout



FINISHES

- PC Polished Chrome



STANDARDS

- ASME A112.18.1
- ANSI / NSF 61, SECTION 9
- CUPC / IAPMO LISTED
- ANSI A117.1 / ADA COMPLIANT
- CONTAINS NO MORE THAN 0.25% WEIGHTED AVERAGE LEAD CONTENT

FLOW

- 1.1 GPM Flow Rate, 6.5 ozf Spray Force Spray Valve

WARRANTY

- Lifetime Limited Warranty
- Lifetime Residential Warranty
- 5 Year Commercial Warranty

0650-60-AD0/REV. 11 2016

Product Specifications subject to change without notice

Job Name _____ Date _____

Model Specified _____ QTY _____

Customer/Wholesaler _____

Contractor _____


Architect/Engineer _____

Submitted as Shown _____

Submitted w/ Variations _____

Model# 0650-60-AD0

Single Handle Pre-Rinse Faucet

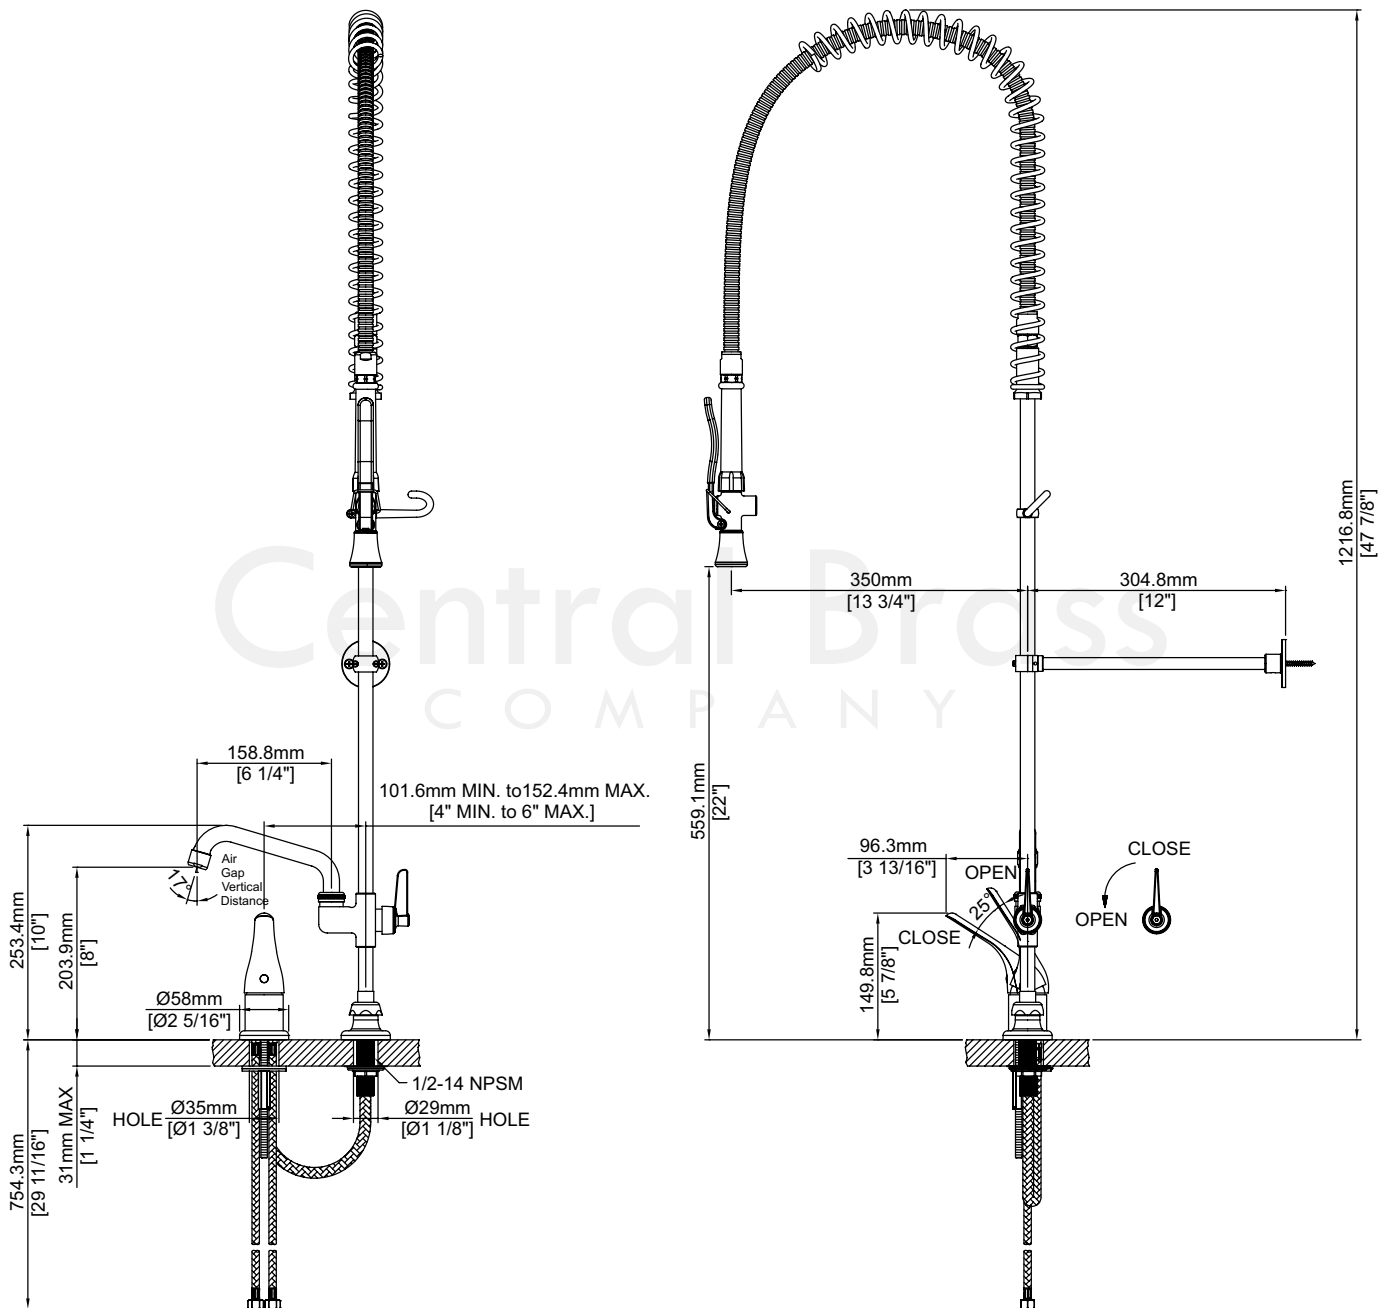

0650-60-AD0/REV. 11 2016

Product Specifications subject to change without notice