

**SUBMITTAL SHEET**

JOB NAME	ITEM TAG
JOB LOCATION	PART NUMBER
CONTRACTOR	DATE
ENGINEER APPROVAL	DATE

**BRASS RAISED SQUARE HEAD CLEANOUT PLUG**

**DWV Cleanout Plug**

Designed for DWV installations only, permitting access to the system.

Can be threaded into DWV cleanout fittings.


Prevents sewer gasses from entering the building.

Solid design is not drilled and tapped for cover and cover screw.

Durable brass construction is reusable, ideal for residential and commercial applications.

Available in nominal sizes 1-1/4" to 6"

- Conforms to the Southern Code standard.

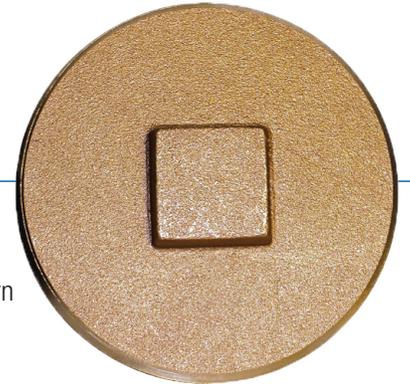


**Pictured:**  
Raised Square  
Head Plug

**Working Pressure, Non Shock (PSI)**

Cold working pressure (CWP): < 10 psi (DWV)

**MATERIAL SPECIFICATION**

PART	MATERIAL	SPECIFICATION
Body	Cast Brass	ASTM B584 UNS C85700

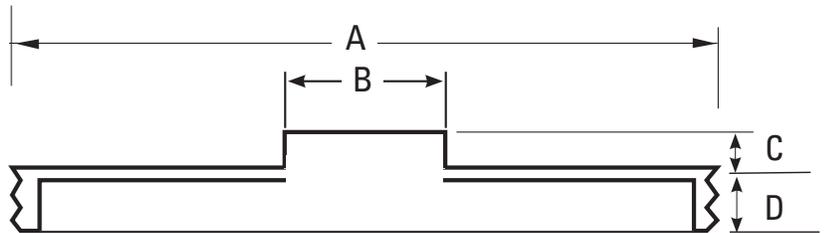

**Pictured**  
**Raised Square Head Plug**  
Cut-away

DIMENSIONS					
Part Number	Nominal Size	A	B*	C	D
302-603	1-1/4"	1.58	0.62	0.36	0.55
302-604	1-1/2"	1.87	0.81	0.28	0.43
302-605	2"	2.35	0.99	0.34	0.46
302-606	2-1/2"	2.83	1.01	0.36	0.42
302-607	3"	3.46	1.26	0.35	0.48
302-608	3-1/2"	3.93	1.43	0.35	0.47
302-609	4"	4.46	1.36	0.36	0.45
302-610	5"	5.50	1.39	0.36	0.51
302-611	6"	6.56	1.44	0.42	0.57

\*flat-to-flat