
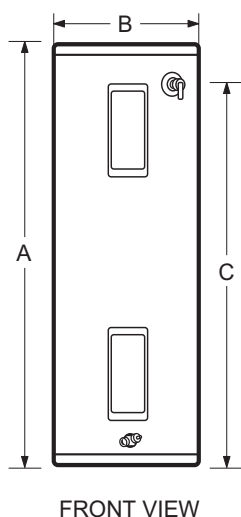


Residential Electric Models



Model Number	Gal. Cap.	Standard Watts	Standard Voltage	Energy Factor	1st Hr. Rating	GPH @ 90°F Rise	A	B	C	Ship. Wt.
Energy Saver with Insulation Blanket - Short Models										
KSA030KDB	28	4500	240V	.95	40	21	30"	20"	21-3/4"	90
KSA040KDB	38	4500	240V	.95	46	21	31-3/4"	24"	24"	118
KSA050KDB	48	4500	240V	.95	57	21	34"	26-1/2"	25"	172
Energy Saver - Short Models										
KSA030KD	28	4500	240V	.95	43	21	31-1/4"	24"	21-3/4"	115
KSA040KD	38	4500	240V	.95	44	21	33-1/2"	26"	24"	118
Energy Saver with Insulation Blanket - Medium Models										
KMA030KDB	30	4500	240V	.95	48	21	39"	20"	30-1/2"	95
Energy Saver - Medium Models										
KMA030KD	30	4500	240V	.95	49	21	39-3/4"	22"	30-1/2"	94
KMA040KD	40	4500	240V	.95	55	21	50"	20-1/2"	40-3/4"	109
KMA050KD	50	4500	240V	.95	62	21	49-3/4"	23"	40-1/2"	161
Energy Saver - Tall Models										
KTA030KD	30	4500	240V	.95	47	21	46-1/2"	19"	39-1/2"	95
KTA040KD	40	4500	240V	.95	51	21	60-1/4"	20"	53-1/4"	118
KTA052KD	50	4500	240V	.95	73	21	60-1/2"	22"	51-1/4"	134
KTA055KD	55	4500	240V	.94	76	21	56-1/2"	24"	48-1/2"	145

Notes: Standard Voltage and Wattage: 240V – 4500W.

Standard Features

- NAECA III Code Compliance
- Approved for Manufactured Home
- Adjustable Electric Thermostat Control
- Immersion Heating Elements
- Glass-Lined Steel Tank
- Non-CFC Foam Insulation
- Tank Saver Anode
- Heat Trap
- Temperature & Pressure Relief Valve
- Brass Drain Valve
- 6- Year Limited Tank & Parts Warranty*
– See warranty sheet for details.
- 10-Year Extended Warranty Available
– Available for residential applications only.
* 1-year limited tank & parts warranty when installed in a commercial application.

ELEMENT AVAILABILITY SCHEDULE			
Wattage	C - 120V	J - 208V	A - 240V
C-1500	N/A	Yes	Yes
D-1650	Yes	N/A	N/A
E-2000	Yes	Yes	Yes
F-2500	Yes	Yes	Yes
G-3000	Yes	Yes	Yes
H-3500	N/A	Yes	Yes
J-4000	N/A	Yes	Yes
K-4500	N/A	Yes	Yes
M-5000	N/A	Yes	Yes
N-5500	N/A	Yes	Yes
P-6000	N/A	N/A	Yes

RECOVERY RATE (GPH @ °F)			
40°F	70°F	100°F	
16	9	6	
17	10	7	
21	12	8	
26	15	10	
31	18	12	
36	21	14	
41	24	17	
47	27	19	
52	30	21	
57	32	23	
62	35	25	

VOLTAGE SCHEDULE	
C – 120V	1ø
J – 208V	1ø
A – 240V	1ø