



Lochinvar®
HIGH EFFICIENCY BOILERS & WATER HEATERS

**HEAT PUMP HYBRID
WATER HEATER
Submittal Sheet**

RHE-Sub-05

HEAT PUMP ELECTRIC WATER HEATERS

JOB NAME _____

LOCATION _____

ARCH./ENGR. _____

WHOLESALE _____

MECH. CONTRACTOR _____

MODEL NO. _____

RECOVERY RATE IN GPH _____ **@** _____ **°F RISE**

GALLON CAPACITY _____

VOLTAGE/PHASE _____

KW _____


NOTES

Standard Features

- Heat Pump w/ Elements
- Glass-lined Steel Tank
- Tank Saver Anode
- LED Display
- Non-CFC Foam Insulation
- Screw-In Element Mounting
- 300 psi Test Pressure, 150 psi Working Pressure
- Temperature & Pressure Relief Valve
- Factory Installed Heat Traps
- Brass Drain Valve
- 10 Year Limited Tank and Parts Warranty*
(See warranty for details)

* 1 year limited tank and parts warranty when installed
in commercial applications

Dimensions and Specifications

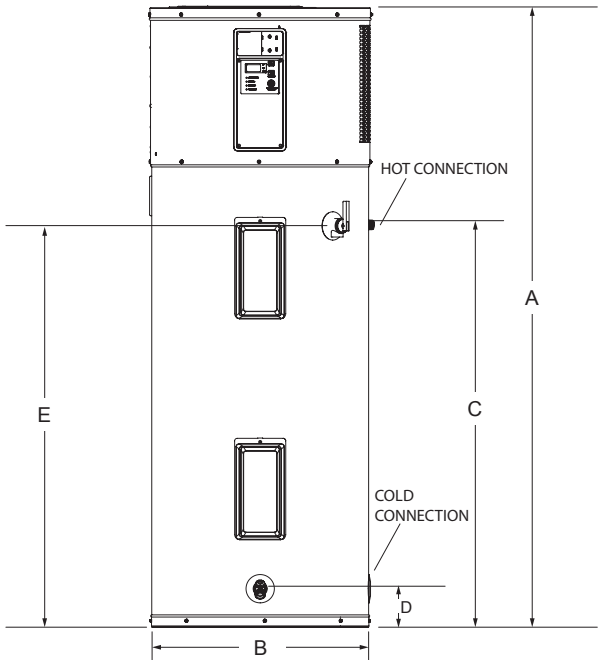

FOR EASE IN ORDERING
BY MODEL NUMBER

HP	A	052	K	D
HEAT PUMP	VOLTAGE	TANK CAPACITY	ELEMENT WATAGE	ELEMENT QTY

This heater has a 10 year warranty. It is a heat pump model, has a 50 gallon capacity with a 208/240 volt 4500 watt upper element and 4500 watt lower element.

Model Number	Nominal Gallon Cap	Rated Storage Cap.	Input Watts	Standard Voltage	1st Hr. Rating (Hybrid)	UEF	A	B	C	D	E	Ship. Wt.
HPA052KD	50	46	4500	208V/240V	66	3.45	63"	22"	40-1/2"	3-3/4"	40-1/2"	196
HPA068KD	66	67	4500	208V/240V	79	3.45	61"	27"	38"	4"	38"	289
HPA082KD	80	82	4500	208V/240V	86	3.45	69"	27"	46"	4"	46"	307

Water connections are 3/4" NPT. Available in 4500 watts only.