



Lochinvar®

LIGHT SERVICE COMMERCIAL ELECTRIC WATER HEATER

Submittal Sheet

CLS-Sub-04

Job Name:

Model No.:

Capacity (gal.):

Location:

Voltage/Phase:

Recovery Rate in GPH @ F° Rise:

Engineer:

KW:

Equipment Tag(s):



Agent/Wholesaler:

Contractor:

NOTES:

Standard Equipment:

- Glass-Lined Steel Tank
- Non-CFC Foam Insulation
- Adjustable Thermostats
- Automatic Overheat Protection
- Wired for Simultaneous Operation Standard
- Field convertible to non-simultaneous operation
- Tank Saver Anode
- ASME Temperature & Pressure Relief Valve
- 6 Year Limited Tank Warranty, 1 Year Limited Parts Warranty (See warranty)

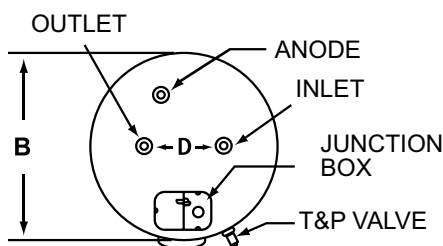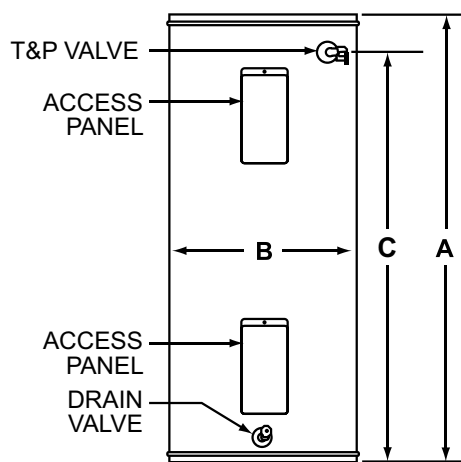

For Ease in Ordering by Model Number

L	S	T	082	W	R
LIGHT	SERVICE	TALL	GALLON CAPACITY	VOLTAGE	ELEMENT WATTAGE

This is a Tall Commercial Electric 277 volt model with a tank capacity of 80 gallons. The upper and lower elements are 6,100 watts.

Model Number	Gallon Capacity	Voltage	Element Wattage	A	B	C	D	Shipping Weight
LST-66 WR	66	277V	6,100	60-1/4"	22"	53"	8"	146
LST-82 WR	80	277V	6,100	60-1/2"	24"	52-1/4"	8"	175
LST-119 WR	119	277V	6,100	61-1/2"	28"	54-1/2"	8"	268

Notes - 3/4" water connections on 8" center

Element Wattage	Recovery Rate (GPH @ °F Rise)				
	40°F	60°F	80°F	100°F	120°F
Non-Simultaneous					
6100 watt	56	38	28	23	19
Simultaneous					
12200 watt	113	75	56	45	38

Voltage Schedule

W - 277V/1 PH

