



**JUNIOR ELECTRIC
WATER HEATER
Submittal Sheet**

JR-Sub-11

JUNIOR ELECTRIC WATER HEATERS

JOB NAME _____

LOCATION _____

ENGINEER _____

WHOLESALE _____

MECH. CONTRACTOR _____

MODEL NO. _____

RECOVERY RATE IN GPH _____ @ _____ °F RISE

GALLON CAPACITY _____

VOLTAGE/PHASE _____

KW _____

NOTES

Standard Features

- NAECA Code Compliant
- Meets ASHRAE/IES 90.1
- Meets UBC, CEC and HUD National Codes
- Approved for Manufactured Homes
- Adjustable Thermostat Control
- Immersion Heating Elements
- Manual Reset High Limit Safety Control
- Glass-lined Steel Tank
- 300 psi Test Pressure, 150 psi Working Pressure
- Temperature and Pressure Relief Valve
- Non-CFC Foam Insulation
- Factory Installed Heat Traps
- Tank Saver Anode
- Brass Drain Valve
- 6 Year Limited Tank and Parts Warranty*
(See warranty for details)

* 1 year limited tank and parts warranty when installed
in commercial applications

Optional Equipment

Place an X in the box by all options that apply


6 Way Wall Mounting Shelf (JKT 3004)

10 Year Extended Warranty Kit


residential applications only

Dimensions and Specifications

2.5 gallon model

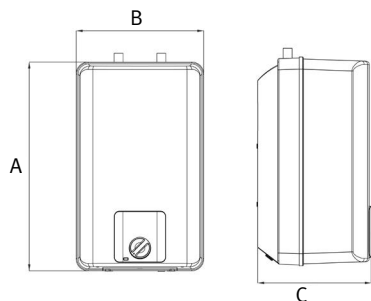

6 - 40 gallon models

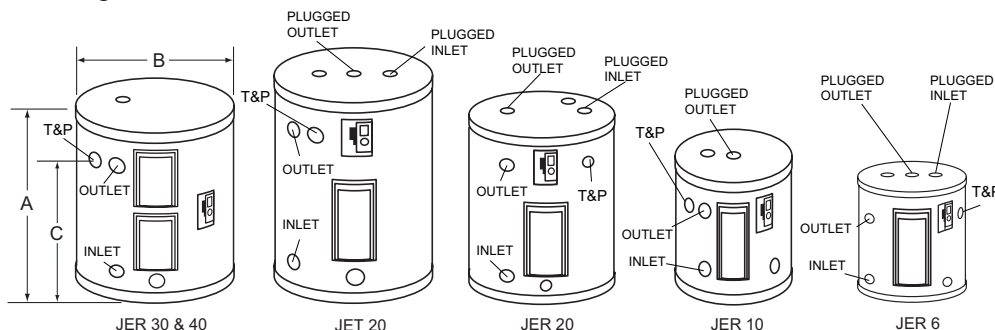

Model Number	Nominal Gallon Cap.	Rated Storage Cap.	Standard Voltage	Standard Watts	Min Watts	Max Watts	UEF	1st HR. Rating	GPH @ 90°F Rise	A	B	C	Ship. Wt.
Point-Of-Use Models													
JEC002BS	2.5	2.6	120v	1440	N/A	N/A	N/A	N/A	7	14-1/2"	11-3/4"	10-1/2"	17
JEC004BS	4	4	120v	1440	N/A	N/A	N/A	N/A	7	19-1/4"	11-3/4"	10-1/2"	20
JEC006BS	6	6	120v	1440	N/A	N/A	N/A	N/A	7	20"	13-3/4"	12-1/2"	24
Junior Electric Models with Insulation Blanket													
JER-30B DAK	28	26	240v	4500	1650	6000	.90	47	21	30"	22"	21-3/4"	101
JER-40BW DAJ	38	35	240v	4000	1650	4000	.91	38	18	31-3/4"	24"	24"	118
JER-40B DAK	38	35	240v	4500	4500	6000	.94	57	21	31-3/4"	24"	24"	118
Junior Electric Models													
JER-06 SCD	6	6	120v	1650	1650	3000	N/A	N/A	8	15-1/4"	14-1/4"	10-3/4"	35
JER-10 SCD	10	9	120v	1650	1650	6000	N/A	N/A	8	18-1/4"	16"	12-1/4"	41
JER-20 SCF	19	17	120v	2500	2500	6000	N/A	N/A	11	24-3/4"	18"	18-3/4"	68
JET-20 SCF	19.9	19.0	120v	2500	2500	6000	N/A	N/A	11	31-3/4"	16"	25-3/4"	68
JER-30 DAK	28	26	240v	4500	1650	6000	.91	43	21	31-1/4"	24"	21-3/4"	115
JER-40W DAJ	38	35	240v	4000	1650	4000	.91	38	18	33-1/2"	26"	24"	118
JER-40 DAK	38	35	240v	4500	4500	6000	.93	54	21	33-1/2"	26"	24"	118

Note: The Point-Of-Use models are available in 120 volt, 1440 watts only. Water connections are 3/4" NPT.

Alternate Elements for 6-40 Gallon			
Wattage	C - 120V	J - 208V	A - 240V
C-1500	N/A	Yes	Yes
D-1650	Yes	N/A	N/A
E-2000	Yes	Yes	Yes
F-2500	Yes	Yes	Yes
G-3000	Yes	Yes	Yes
H-3500	N/A	Yes	Yes
J-4000	N/A	Yes	Yes
K-4500	N/A	Yes	Yes
M-5000	N/A	Yes	Yes
N-5500	N/A	Yes	Yes
P-6000	N/A	N/A	Yes

Recovery Rate (GPH @ °F Rise)			
40°F	70°F	100°F	
16	9	6	
17	10	7	
21	12	8	
26	15	10	
31	18	12	
36	21	14	
41	24	17	
47	27	19	
52	30	21	
57	32	23	
62	35	25	

VOLTAGE SCHEDULE

C - 120V 1Ø

J - 208V 1Ø


A - 240V 1Ø

FOR EASE IN ORDERING
BY MODEL NUMBER


JER	06	S	C	D
MODEL	GALLON CAPACITY	ELEMENT QTY	VOLTAGE	ELEMENT WATTAGE

This heater is a Junior Electric Model that is 120 volts, 1 phase with a 6 gallon capacity and has a 1650 wattage heating element.


Six Way Shelf Mountings - 2.5, 6 and 10 Gallon Models Only. (Part number JKT 3004)




NO. 1




NO. 2




NO. 3



NO. 4



NO. 5



NO. 6



Lochinvar, LLC
300 Maddox Simpson Parkway
Lebanon, Tennessee 37090
P: 615.889.8900 / F: 615.547.1000
Lochinvar.com

