



Trapper™

Wet Inlet Grease Interceptors




The Trapper™ Series is a wet inlet style grease interceptor recommended specifically for the replacement of Rockford G-Series and GF-Series, MIFAB MI-ROC Series and the obsolete Schier AT-Series and ATG-Series.

The Trapper™ also features heavy duty polyethylene construction, pedestrian rated cover, built-in flow control, built-in triple outlet and Diffusion Flow™ grease separation technology.

Installation Overview

Where possible, “roll down” the inlet drain line using (2) 45-degree street elbows. If space is constrained (2) 22-degree elbows may be used. Installation without roll down of inlet line will result in standing water in inlet line and may cause backups into floor drains/sinks during peak flows. For best option, eliminate original wet inlet piping, reset with “dry inlet” piping and install Great Basin™ grease interceptor.

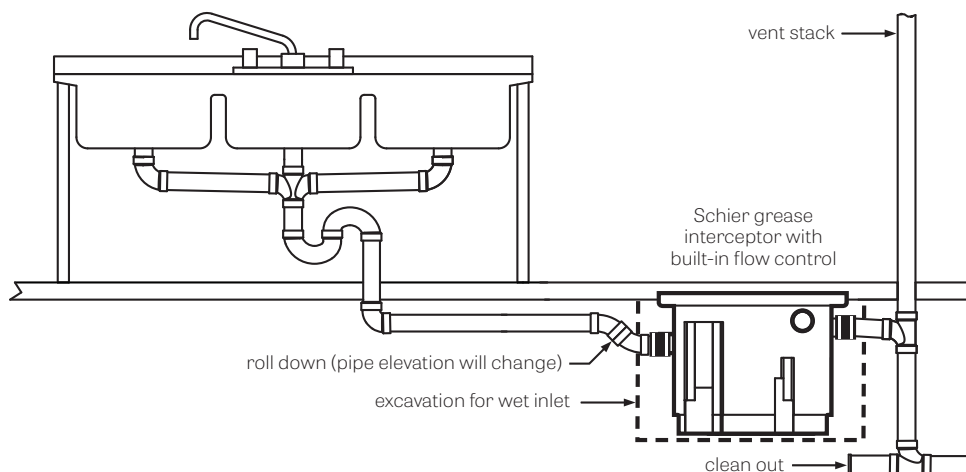

SCHIER
LIFETIME GUARANTEED
GREASE INTERCEPTORS

Trapper™ Wet Inlet Grease Interceptors


Specifications

Schier Model	Capacity			Pipe Sizes			Rough-in Dimensions (in.)									Poly Cover Load Rating (lbs.)	Weight (lbs.)	
	Flow Rate (GPM)	Grease (lbs.)	Liquid (gal.)	Plain End SCH.40		Optional Male Thread (no charge)	Body			Inlet		Outlet					Dry	Wet
				Standard	Optional (no charge)		L	W	H	A	B	C	D	E				
PATG-1412	10	20	5.3	2	3	2, 3	17½	15¼	15	8⅝	6⅝	10¼	4¾	6	500	22	66	
PATG-1815	15	60	10	2	3	2, 3	23½	15¼	18½	11	7½	13½	5	6	500	27	110	
PATG-15-LO	15	60	10	2	3	2, 3	24½	18½	10¾	6	4¾	7½	3¼	5¾	500	37	120	
PATG-1820	20	70	17	2	3	2, 3	25½	19¼	19¼	12	7¼	14¼	5	6¼	500	37	179	
PATG-20-LO	20	80	21	2	3	2, 3	30½	24 ½	13¾	6 ½	7¼	10¼	3½	5¾	500	60	235	
PATG-2025	25	98	28	3	2	2, 3	29¾	23 ½	23¼	13	10¼	16	7¼	6 ⅞	500	62	296	
PATG-2420	30	109	31	3	2, 4	2, 3	29¾	23½	23¼	14 ½	8¾	17 ⅞	5⅞	6 ⅞	500	62	321	
PATG-30-LO	30	90	23	3	2	2, 3	34½	24½	13¾	6 ½	7¼	10¼	3½	5¾	500	62	254	
PATG-2635	35	120	40	3	2, 4	2, 3, 4	29¾	23½	28½	16½	12	21	7½	6 ⅞	500	73	407	
PATG-35-LO	35	98	28	3	2	2, 3	40½	24½	13¾	6 ½	7¼	10¼	3½	5¾	500	75	308	
PATG-2824	40	180	54	4	3	3, 4	31¾	26	32½	21 ½	11	25¾	6¾	6 ⅞	500	85	535	
PATG-3050	50	259	60	4	3	3, 4	35¼	26	32½	21 ½	11	25¾	6¾	6 ⅞	500	95	595	
PATG-50-LO	50	128	41	3	4	3, 4	54	24¾	16¼	6¾	9½	11	5¼	12	500	107	449	
PATG-3224	60	288	67	4	3	3, 4	38¾	26	32½	21½	11	25¾	6¾	6 ⅞	500	105	664	
PATG-3475	75	300	80	4	3	3, 4	39	28½	32½	22	10½	26¼	6¼	6 ⅞	500	125	792	
PATG-3628	100	350	110	4	3	3, 4	41¼	35½	32½	22	10½	26¼	6¼	6 ⅞	500	160	1,078	




Models PATG-2025 & PATG-3050 are certified to ASME A112.14.3 and listed by IAPMO. All other models are manufactured to conform to that standard.

PATG-1412 through PATG-3628

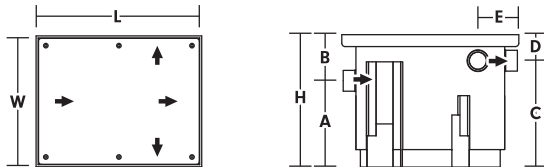

Low Profile Model (-LO Suffix)

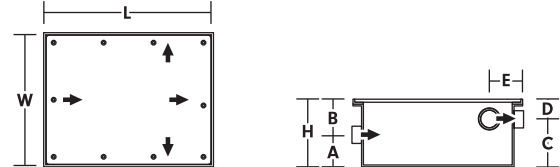

SCHIER
LIFETIME GUARANTEED
GREASE INTERCEPTORS