
SUBMITTAL DATA SHEET

NL Service Fitting – 74758

Copper Flare x Copper Flare

| MODEL | SIZE | A | В | C | D | Е |
|-------|-----------|------|--------|-----|-------|-------|
| 74758 | 1/2 | 2.06 | 1.06 | HEX | 1/2 | 1/2 |
| 74758 | 1/2 X 3/4 | 2.21 | 1.38 | HEX | 1/2 | 3/4 |
| 74758 | 3⁄4 | 2.50 | 1.20 | DCT | 3/4 | 3/4 |
| 74758 | 3⁄4 X 1 | 2.57 | 1.34 | HEX | 3/4 | 1 |
| 74758 | 1 | 2.88 | 1 . 38 | DCT | 1 | 1 |
| 74758 | 1 1/4 | 3.87 | 2.38 | HEX | 1 1/4 | 1 1/4 |
| 74758 | 1 1/2 | 3.88 | 2.88 | HEX | 1 1/2 | 1 1/2 |
| 74758 | 2 | 4.25 | 3.29 | HEX | 2 | 2 |

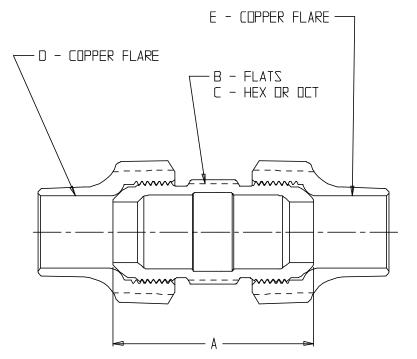

SUBMITTAL INFORMATION

- Manufactured in compliance with ANSI/AWWA C800 (latest revision)
- Brass components in contact with potable water conform to ASTM B584, UNS C89833 (latest revision) and identified with "NL"
- Certified to NSF/ANSI 61 and NSF/ANSI 372
- Brass components not in contact with potable water conform to ASTM B62 and ASTM B584, UNS C83600 -85-5-5 (latest revision)
- Large wrench flats provided for proper installation



A.Y. McDonald Mfg. Co. P.O. Box 508 Dubuque, IA 52004-508 **Toll Free:** 1-800-292-2737 **Fax:** 1-800-832-9296 **Hours:** 7:00 a.m. – 5:00 p.m., CST

sales@aymcdonald.com www.aymcdonald.com

A.Y. McDonald considers the information on this assembly drawing correct when published. Item and option availability, including specifications, are subject to change without notice.

Submitted by: